


**OUTDOOR
ARCHITECTURAL
LUMINAIRES**


ARIDA WT500 SERIES

Semi-Recessed
Integral Ballast


Quartz Halogen/ Ceramic Metal Halide
Compact Fluorescent

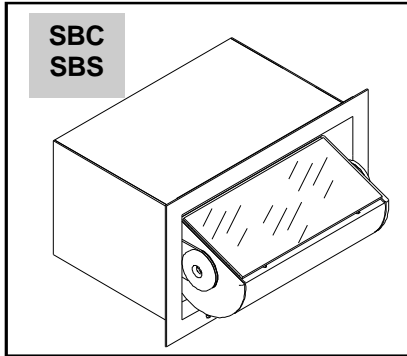

DIMENSIONS

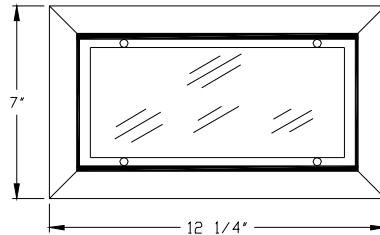

MOUNTING BRACKET

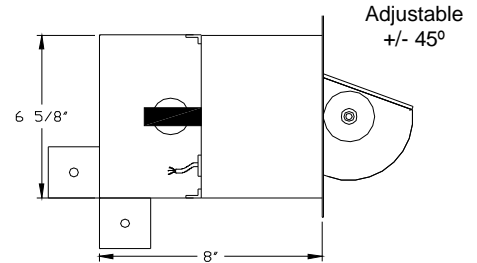

ORDERING

PREFIX	MOUNTING TYPE	VOLTAGE	FINISH	OPTIONS
Quartz Halogen WT500 (1)-Q250 Max. (T4, Mini-Can) WT510 (1)-Q350 Max. (T3 RSC) Metal Halide WT523 (1)-100W MH (T6, G12) Ceramic Metal Halide WT517 (1)-39W CMH (T6, G12) WT522 (1)-70W CMH (T6, G12) WT527 (1)-150W CMH (T6, G12) Compact Fluorescent * WT572 (1)-F26W DTT (PLT, GX24q-4) WT527 (1)-150W CMH (T6, G12)	SBC Recessed housing for concrete construction SBS Recessed housing for stud/joist construction Semi-Recessed Electronic Integral Ballast Fluorescent ballasts are integral	1. 120V 2. 277V 3. 208V 4. 240V 7. 347V	TW Textured White TBL Textured Black TBR Textured Bronze TN Textured Natural TS Textured Sandstone TV Textured Verdi SF Specify Finish (See Color Chart) CC Custom Color (Contact Factory)	WVS Solid Cutoff Visor WBF Internal Baffle WCVG Colored tempered glass filter in visor frame WCVD Colored dichroic glass filter in visor frame WLVL External Louvered Visor EB Integral electronic ballast for HID fixtures
Ordering Example: WT 517 / SBC/SBS / 1 / TW / WVS * Fluorescent only available in 120V, 277V, & 347V ** Contact Factory for Color Selection				

SPECIFICATIONS

Fixture Housing: Sealed, high grade extruded aluminum with die cast aluminum end plates welded in place. Flush stainless steel socket cap bolts allow easy aiming adjustment.

Recessed Housing: Is die-formed aluminum and provided with a cast J-box for through wiring. An integral weather tight ballast compartment is in the rear of this housing. An SBS back box is provided with a thermal protector and is suitable for Non IC installations.

Lens : Single piece cast aluminum doorframe held in place by four retained stainless steel socket head screws. Lens is tempered micro-prismatic glass. Lens is sealed to housing with a single piece molded rubber gasket.

Reflector: Die formed, 95% reflective, peened, specular, anodized aluminum that provides clean, even distribution with no streaks or striations.

Finish: All surfaces are pretreated in a phosphate wash, finished to 3 mil. thick with TGIC powder paint with ultraviolet inhibitors.

Electrical: Integral ballasts for CMH and MH Luminaires are high power factor core coils located in the ballast compartment of the recessed Housing. Fluorescent Luminaires are supplied with electronic ballasts mounted in the same easily serviceable location.

Labels: The Luminaire and back box assembly are UL and CUL approved for Wet Locations.



PREFIX	MOUNTING TYPE	VOLTAGE	FINISH	OPTIONS
WT5____	SB____			

APPROVED: _____

JOB NAME: _____

TYPE: _____

Insight Lighting reserves the right to change specifications without notice due to product improvements.

INSIGHT

Rio Rancho, NM 87144
TEL: 505 345-0888
www.insightlighting.com

WT500-SBC/SBS 04-2008