



OUTDOOR
ARCHITECTURAL
LUMINAIRES




ARIDA WT500 SERIES

Recessed Ground /
Surface Mount

Quartz Halogen / Ceramic Metal Halide /
Compact Fluorescent

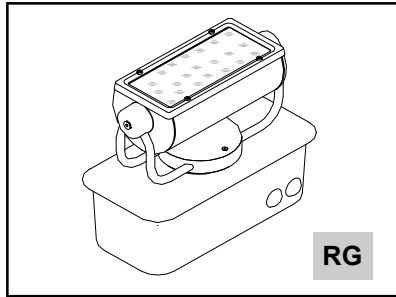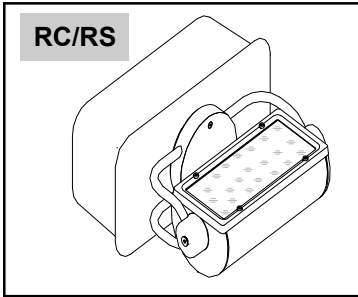

DIMENSIONS

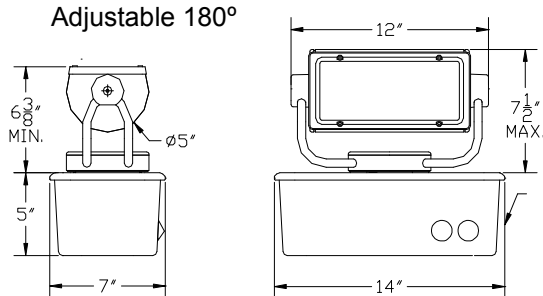

(2x) CONDUIT
PLUG SUPPLIED.
1/2\" CONDUIT
AND CONDUIT
CONNECTOR
SUPPLIED
(BY OTHERS)

RG = Ground Mount with Recessed Ballast Box
RC = Wall Mount with Recessed Ballast Box – Concrete Construction
RS = Wall Mount with Recessed Ballast Box – Stud / Joint Construction

ORDERING

PREFIX	MOUNTING TYPE	VOLTAGE	FINISH	OPTIONS
Quartz Halogen (100-350W Available in 120V) WT500 (1)-Q250 Max. (T4, Mini-Can) WT510 (1)-Q350 Max. (T3 RSC)	RG In-Ground	Quartz 1. 120V	TW Textured White TBL Textured Black TBR Textured Bronze TN Textured Natural TS Textured Sandstone TV Textured Verdi	VS Solid cutoff visor BF Internal baffle CVG Colored tempered glass filter in visor frame CVD Colored dichroic glass filter in visor frame LV External louvered visor
Ceramic Metal Halide WT517 (1)-39W CMH (T6, G12) WT522 (1)-70W CMH (T6, G12) WT527 (1)-150W CMH (T6, G12)	RC In-Wall/Ceiling Mount Concrete Construction	HID. / FL. 1. 120V 2. 277V	SF Specify Finish (See Color Chart) CC Custom Color (Contact Factory)	
Compact Fluorescent WT572 (1)-F26W DTT (PLT, GX24q-4)	RS In-Wall/Ceiling Mount Stud/Joist Construction			
Consult Factory for Specific Lamp Requirements	All With Ballast Back Box			

Ordering Example: WT 517 / RG / 1 / TW / VS

SPECIFICATIONS

Housing: Sealed high grade extruded aluminum with die-cast aluminum end plates welded in place. Flush stainless steel socket cap bolts allow easy aiming adjustment.

Ballast Housing: Single Piece die-cast aluminum and powder painted to 3 mil thickness with a protective epoxy coating applied to in-ground section of the housing

Lens: Single piece cast aluminum doorframe held in place by four stainless steel socket head screws. Lens is tempered micro-prismatic glass. Lens is sealed to housing with a single piece molded silicone gasket.

Reflector: Die-formed, 95% reflective, peened, specular, anodized aluminum that provides clean, even distribution with no streaks or striations.

Finish: All surfaces are pretreated in a phosphate wash, finished to 3 mil. thick with TGIC powder paint with ultraviolet inhibitors.

Electrical: Integral electronic ballasts with a Class 'A' sound rating are standard and mounted within the ballast enclosure.

Labels: Luminaires are UL and CUL approved for wet locations in all mounting positions. 150W CMH FIXTURES ARE EISA COMPLIANT.



PREFIX	MOUNTING TYPE	VOLTAGE	FINISH	OPTIONS
WT5___	RG/RC/RS___			

APPROVED: _____

JOB NAME: _____

TYPE: _____

Insight Lighting reserves the right to change specifications without notice due to product improvements.

INSIGHT

Rio Rancho, NM 87144
TEL: 505 345-0888
www.insightlighting.com

WT500-RG-RC-RS 06JUN09