


## FIXTURE PROFILE

LIGHT SOURCE	3.5 W/FT, 70W/FT, 11.0W/FT, 15.0W/FT
DISTRIBUTION	DIRECT, DIRECT/INDIRECT
COLOR	2700K, 3000K, 3500K, 4000K
CRI	82 (OPTIONAL 90 CRI)
PERFORMANCE	UP TO 105 lm/W
VOLTAGE	UNIVERSAL 120-277 V
POWER	REMOTE POWER SUPPLY
DIMMING	0-10V, LUTRON HI-LUME 1% ECOSYSTEM
LENGTHS	SMALL (32"), MEDIUM (43"), LARGE (55")
MOUNTING	POWERED SUSPENSION CABLES
HOUSING	0.125" THICK POWDER COATED ALUMINUM
END CAPS	MACHINED ALUMINUM, BRASS
LENS	HIGH PERFORMANCE EXTRUDED ACRYLIC
FINISH	TEXTURED WHITE, TEXTURED BLACK
WARRANTY	5-YEAR LIMITED
CERTIFICATION	ETL AND cETL APPROVED FOR DRY LOCATION

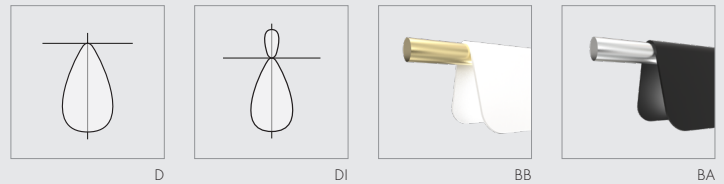

## ORDER OPTIONS


<b>ADB</b>									
<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>I</b>	

<table border="1" style="width: 100%;"> <tr> <th colspan="2">A FIXTURE</th> </tr> <tr> <td>ADOBE</td> <td>ADB</td> </tr> </table>	A FIXTURE		ADOBE	ADB	<table border="1" style="width: 100%;"> <tr> <th colspan="2">D LIGHT DIRECTION</th> </tr> <tr> <td>DIRECT</td> <td>D</td> </tr> <tr> <td>DIRECT/INDIRECT</td> <td>DI</td> </tr> </table>	D LIGHT DIRECTION		DIRECT	D	DIRECT/INDIRECT	DI	<table border="1" style="width: 100%;"> <tr> <th colspan="2">G CONTROL</th> </tr> <tr> <td>NO DIMMING</td> <td>NO</td> </tr> <tr> <td>0-10V DIMMING</td> <td>DIM</td> </tr> <tr> <td>LUTRON Hi-lume 1% EcoSystem with Soft-On and Fade-to-Black</td> <td>LES-LDE1</td> </tr> <tr> <td colspan="2">not available in 11W or 15W medium and large</td> </tr> <tr> <td colspan="2">see Contra specification sheet for details controls by others</td> </tr> </table>	G CONTROL		NO DIMMING	NO	0-10V DIMMING	DIM	LUTRON Hi-lume 1% EcoSystem with Soft-On and Fade-to-Black	LES-LDE1	not available in 11W or 15W medium and large		see Contra specification sheet for details controls by others		<table border="1" style="width: 100%;"> <tr> <th colspan="2">I OPTIONS</th> </tr> <tr> <td>BRUSHED BRASS ENDS</td> <td>BB</td> </tr> <tr> <td>BRUSHED ALUMINUM ENDS</td> <td>BA</td> </tr> <tr> <td>HIGH CRI +90</td> <td>HCRI</td> </tr> <tr> <td>PLENUM POWER SUPPLY</td> <td>PL</td> </tr> <tr> <td colspan="2">plenum power supply available with j-box mounting only</td> </tr> <tr> <td>SURFACE POWER CANOPY</td> <td>SUR</td> </tr> <tr> <td colspan="2">powered suspension cable j-box mounting only not available in large 11W direct/indirect fixture</td> </tr> <tr> <td>LOUVER</td> <td>LV</td> </tr> <tr> <td colspan="2">louver is provided with the same finish as the fixture housing</td> </tr> </table>	I OPTIONS		BRUSHED BRASS ENDS	BB	BRUSHED ALUMINUM ENDS	BA	HIGH CRI +90	HCRI	PLENUM POWER SUPPLY	PL	plenum power supply available with j-box mounting only		SURFACE POWER CANOPY	SUR	powered suspension cable j-box mounting only not available in large 11W direct/indirect fixture		LOUVER	LV	louver is provided with the same finish as the fixture housing	
A FIXTURE																																													
ADOBE	ADB																																												
D LIGHT DIRECTION																																													
DIRECT	D																																												
DIRECT/INDIRECT	DI																																												
G CONTROL																																													
NO DIMMING	NO																																												
0-10V DIMMING	DIM																																												
LUTRON Hi-lume 1% EcoSystem with Soft-On and Fade-to-Black	LES-LDE1																																												
not available in 11W or 15W medium and large																																													
see Contra specification sheet for details controls by others																																													
I OPTIONS																																													
BRUSHED BRASS ENDS	BB																																												
BRUSHED ALUMINUM ENDS	BA																																												
HIGH CRI +90	HCRI																																												
PLENUM POWER SUPPLY	PL																																												
plenum power supply available with j-box mounting only																																													
SURFACE POWER CANOPY	SUR																																												
powered suspension cable j-box mounting only not available in large 11W direct/indirect fixture																																													
LOUVER	LV																																												
louver is provided with the same finish as the fixture housing																																													
<table border="1" style="width: 100%;"> <tr> <th colspan="2">B OUTPUT</th> </tr> <tr> <td>3.5 WATTS/FT</td> <td>3W</td> </tr> <tr> <td>7.0 WATTS/FT</td> <td>7W</td> </tr> <tr> <td>11.0 WATTS/FT</td> <td>11W</td> </tr> <tr> <td>15.0 WATTS/FT</td> <td>15W</td> </tr> <tr> <td colspan="2">not available with direct/indirect fixture</td> </tr> </table>	B OUTPUT		3.5 WATTS/FT	3W	7.0 WATTS/FT	7W	11.0 WATTS/FT	11W	15.0 WATTS/FT	15W	not available with direct/indirect fixture		<table border="1" style="width: 100%;"> <tr> <th colspan="2">E SIZE</th> </tr> <tr> <td>SMALL (34")</td> <td>SM</td> </tr> <tr> <td>MEDIUM (46")</td> <td>MED</td> </tr> <tr> <td>LARGE (58")</td> <td>LRG</td> </tr> </table>	E SIZE		SMALL (34")	SM	MEDIUM (46")	MED	LARGE (58")	LRG	<table border="1" style="width: 100%;"> <tr> <th colspan="2">F MOUNTING</th> </tr> <tr> <td>JBOX</td> <td>JBOX-X</td> </tr> <tr> <td>ARCHITECTURAL</td> <td>ARCH-X</td> </tr> <tr> <td colspan="2">X = cable length specify 24", 36", 48", 72", or 96" contact factory for additional lengths if architectural mounting is selected no jbox cover plate is provided with fixture</td> </tr> </table>	F MOUNTING		JBOX	JBOX-X	ARCHITECTURAL	ARCH-X	X = cable length specify 24", 36", 48", 72", or 96" contact factory for additional lengths if architectural mounting is selected no jbox cover plate is provided with fixture																
B OUTPUT																																													
3.5 WATTS/FT	3W																																												
7.0 WATTS/FT	7W																																												
11.0 WATTS/FT	11W																																												
15.0 WATTS/FT	15W																																												
not available with direct/indirect fixture																																													
E SIZE																																													
SMALL (34")	SM																																												
MEDIUM (46")	MED																																												
LARGE (58")	LRG																																												
F MOUNTING																																													
JBOX	JBOX-X																																												
ARCHITECTURAL	ARCH-X																																												
X = cable length specify 24", 36", 48", 72", or 96" contact factory for additional lengths if architectural mounting is selected no jbox cover plate is provided with fixture																																													
<table border="1" style="width: 100%;"> <tr> <th colspan="2">C LED COLOR</th> </tr> <tr> <td>2700K</td> <td>27K</td> </tr> <tr> <td>3000K</td> <td>30K</td> </tr> <tr> <td>3500K</td> <td>35K</td> </tr> <tr> <td>4000K</td> <td>40K</td> </tr> </table>	C LED COLOR		2700K	27K	3000K	30K	3500K	35K	4000K	40K																																			
C LED COLOR																																													
2700K	27K																																												
3000K	30K																																												
3500K	35K																																												
4000K	40K																																												


PROJECT:	FIXTURE:	NOTES:
----------	----------	--------

**DIMENSIONS** (box mounting shown)


ADOBE SMALL

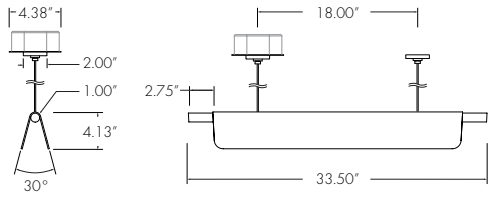


ADOBE MEDIUM

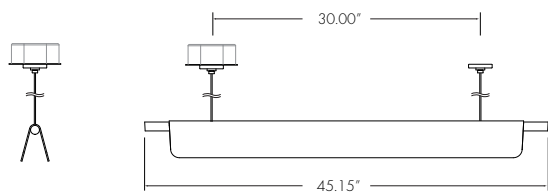

ADOBE LARGE

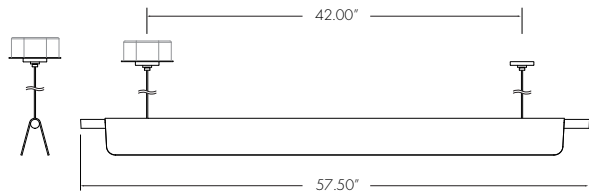

MOUNTING HEIGHT

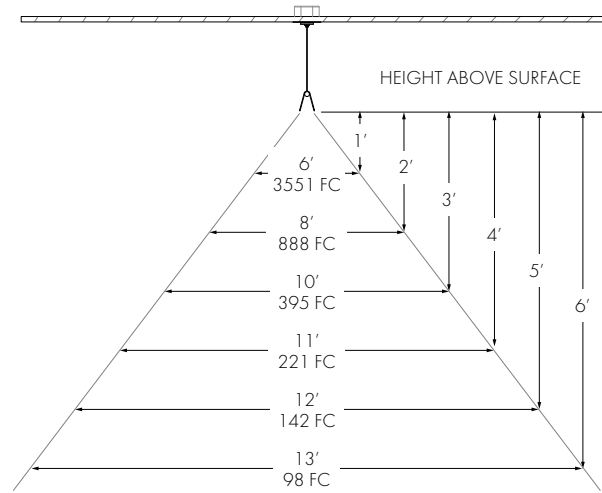


ILLUMINATED AREA

Note: Recommended mounting heights are approximations using a medium 15W/FT fixture

**REMOTE POWER** (supplied with fixture)


REMOTE POWER CONTRA C0.5 - 60W

Provided with all fixtures except large 11W/FT direct/indirect

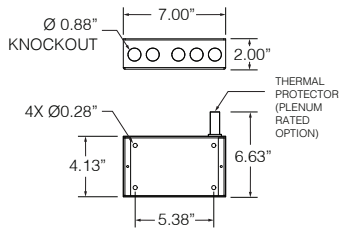


REMOTE POWER CONTRA C1.0 - 96W

Provided only with large 11W/FT direct/indirect fixtures

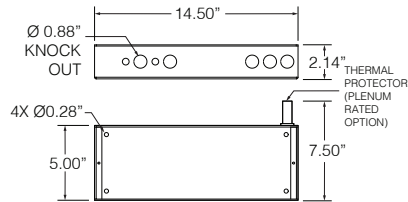

SURFACE POWER CANOPY

Optional surface mounted canopy enclosure for hard ceiling applications with integral driver. Not available with 11W direct/indirect fixtures.


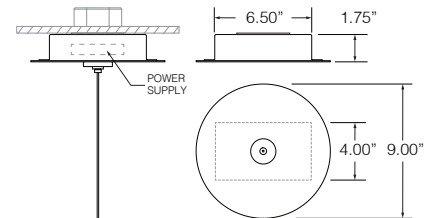


PROJECT:

FIXTURE:

NOTES:

PERFORMANCE DATA

	LENGTH	LED COLOR TEMPERATURE	TOTAL WATTAGE	LUMINAIRE EFFICACY	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT
<b>DIRECT/INDIRECT</b>								
	3.5 W/FT	3000K						
	SMALL		10.5 W	98 lm/W	976 lm	77% DOWN / 23% UP	751 lm	224 lm
	MEDIUM		17.5 W		1220 lm		939 lm	281 lm
	LARGE		24.5 W		1464 lm		1127 lm	337 lm
	7.0 W/FT	3000K						
	SMALL		21.0 W	97 lm/W	1983 lm	77% DOWN / 23% UP	1527 lm	456 lm
	MEDIUM		35.0 W		2479 lm		1909 lm	570 lm
	LARGE		49.0 W		2975 lm		2291 lm	684 lm
	11.0 W/FT	3000K						
SMALL	33.0 W		96 lm/W	3148 lm	77% DOWN / 23% UP	2424 lm	724 lm	
MEDIUM	55.0 W			3935 lm		3030 lm	905 lm	
LARGE		77.0 W		4722 lm		3636 lm	1086 lm	
<b>DIRECT</b>								
	3.5 W/FT	3000 K						
	SMALL		7.0 W	105 lm/W	1086 lm	100% DOWN	1086 lm	
	MEDIUM		10.5 W		1155 lm		1155 lm	
	LARGE		14.0 W		1303 lm		1303 lm	
	7.0 W/FT	3000 K						
	SMALL		14.0 W	104 lm/W	2129 lm	100% DOWN	2129 lm	
	MEDIUM		21.0 W		2265 lm		2265 lm	
	LARGE		28.0 W		2555 lm		2555 lm	
	11.0 W/FT	3000 K						
SMALL	22.0 W		103 lm/W	3442 lm	100% DOWN	3442 lm		
MEDIUM	33.0 W			3630 lm		3630 lm		
LARGE		44.0 W		4094 lm		4094 lm		
15.0 W/FT	3000 K							
SMALL		30.0 W	101 lm/W	4538 lm	100% DOWN	4538 lm		
MEDIUM		45.0 W		4828 lm		4828 lm		
LARGE		60.0 W		5445 lm		5445 lm		

ADDITIONAL INFORMATION

FIXTURE CONSTRUCTION DETAILS:

- SHADE: 0.125" thick custom formed and milled aluminum sheet metal.
- ENDS: Machined aluminum or brass end posts with optional brushed or powder coated finish.
- WEIGHT: Small: 7 lbs / Medium: 8 lbs / Large: 10 lbs
- FINISH: End posts are powder coated to match fixture unless specified otherwise. Canopy and jbox covers are painted textured white.

REMOTE POWER SUPPLY DETAILS:

- ENCLOSURE: 14 gauge aluminum sheet metal, with pre-drilled mounting holes and a removable cover plate for easy wiring access.
- FINISH: All enclosure surfaces are pre-treated and powder coated textured black or white to a 3 mil thickness.

DISTANCE: Distance from power supply to fixture not to exceed 25'.

ELECTRICAL: Contra power supplies are 120-277VAC, output 38VDC. Contra is also available as a plenum ready power supply. AC power is fed to Contra via 1/2" conduit (by others) and AC connections are made within the enclosure. All Contra's are 1/2" conduit ready.

MOUNTING DETAILS:

- JBOX: All jbox configurations mount to a standard 4-0 jbox (provided by others).
- ARCH: All architectural configurations mount directly to the ceiling using concealed fasteners and it is the responsibility of the installer to enclose any splicing as per local codes and ordinances.
- CABLE: The cabling used to suspend the fixture also transfers the fixture's power, and as such requires a specific splicing technique if cut in the field ([see installation instructions](#)).

PROJECT:

FIXTURE:

NOTES: