



INSIGHT

SHAPING THE EXPERIENCE OF LIGHT®

A versatile pendant light inspired by the simple forms of adobe architecture, crafted and manufactured with pride in New Mexico.






A D O B E





CUSTOM COLOR SHOWN

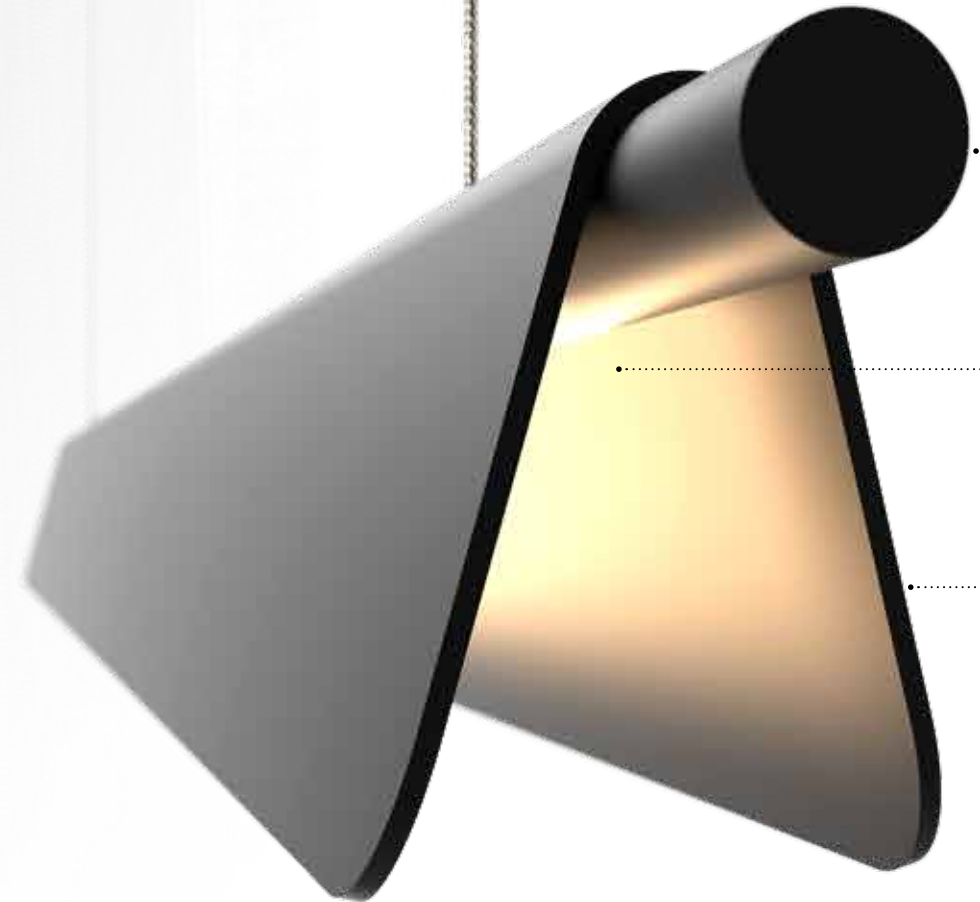


POWERED
SUSPENSION
CABLES

MACHINED
END POSTS

HIGH
PERFORMANCE
DIFFUSER

PRECISION
BENT
ALUMINUM
SHADE


OPTIONAL
MICRO LOUVER

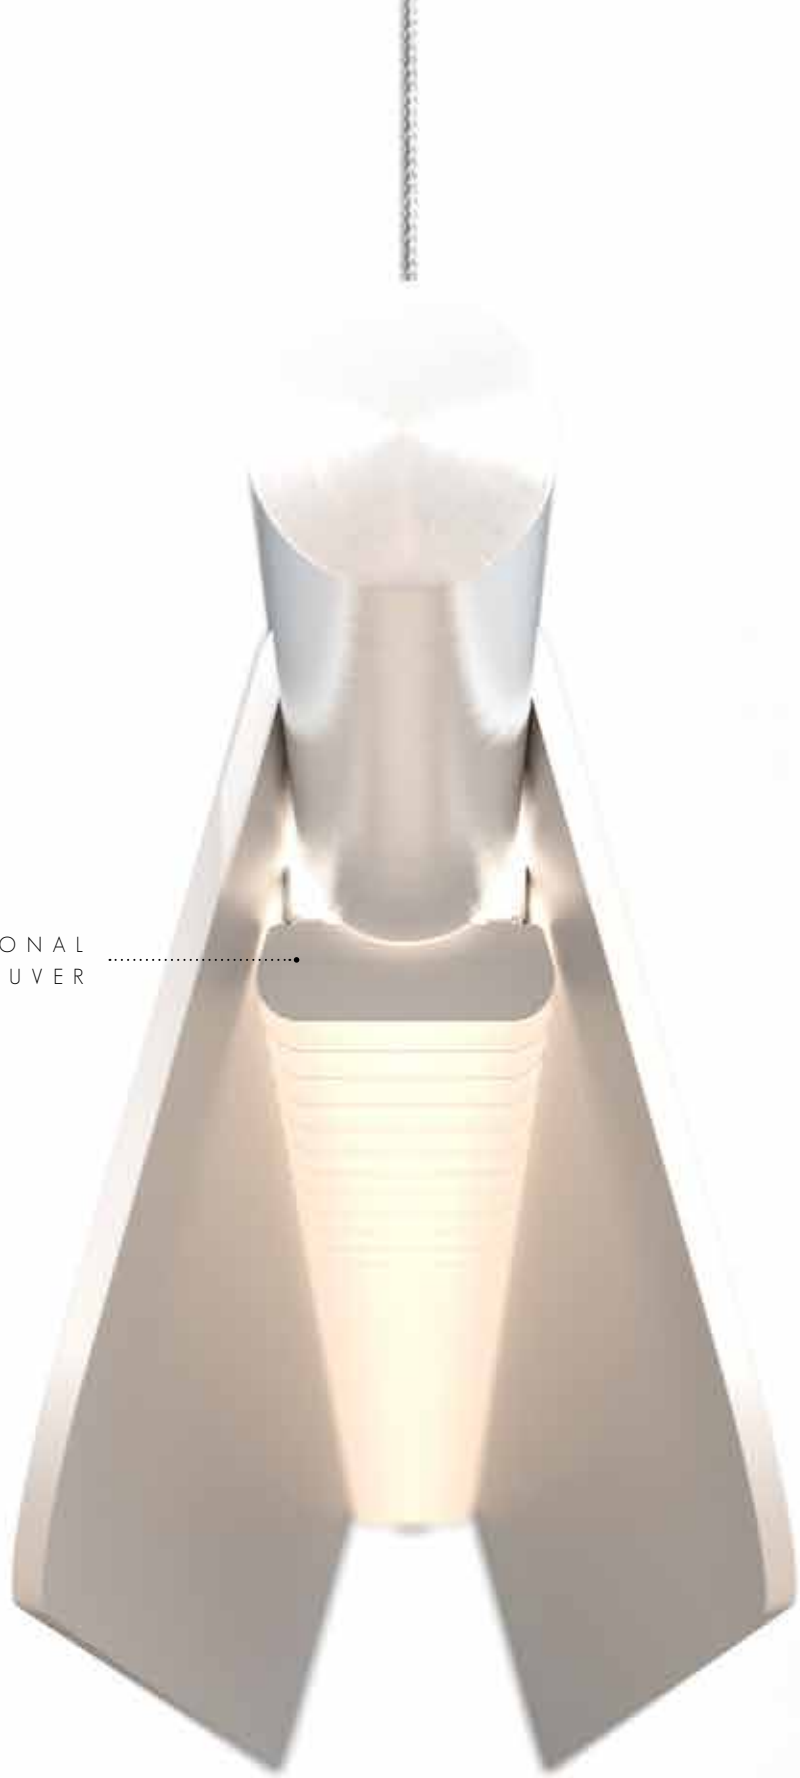

ADOBE PHOTOMETRIC PERFORMANCE


DISTRIBUTION	LENGTH	INPUT WATTAGE	LUMINAIRE EFFICACY	DELIVERED LM TOTAL	DELIVERED LM DIRECT	DELIVERED LM INDIRECT
--------------	--------	---------------	--------------------	--------------------	---------------------	-----------------------

DIRECT / INDIRECT

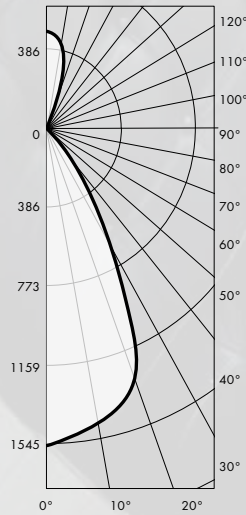

3.5 W/FT	SMALL	10.5 W	98 lm/W	976 lm	751 lm	224 lm
	MEDIUM	17.5 W		1220 lm	939 lm	281 lm
	LARGE	24.5 W		1464 lm	1127 lm	337 lm
7.0 W/FT	SMALL	21.0 W	97 lm/W	1983 lm	1527 lm	456 lm
	MEDIUM	35.0 W		2479 lm	1909 lm	570 lm
	LARGE	49.0 W		2975 lm	2291 lm	684 lm
11.0 W/FT	SMALL	33.0 W	96 lm/W	3148 lm	2424 lm	724 lm
	MEDIUM	55.0 W		3935 lm	3030 lm	905 lm
	LARGE	77.0 W		4722 lm	3636 lm	1086 lm

DIRECT

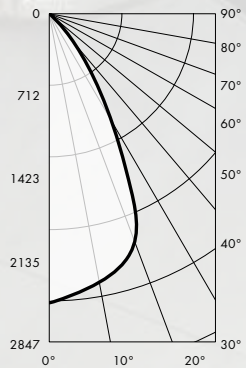


3.5 W/FT	SMALL	7.0 W	105 lm/W	1086 lm	1086 lm	
	MEDIUM	10.5 W		1155 lm	1155 lm	
	LARGE	14.0 W		1303 lm	1303 lm	
7.0 W/FT	SMALL	14.0 W	104 lm/W	2129 lm	2129 lm	
	MEDIUM	21.0 W		2265 lm	2265 lm	
	LARGE	28.0 W		2555 lm	2555 lm	
11.0 W/FT	SMALL	22.0 W	103 lm/W	3422 lm	3422 lm	
	MEDIUM	33.0 W		3630 lm	3630 lm	
	LARGE	44.0 W		4094 lm	4094 lm	
15.0 W/FT	SMALL	30.0 W	101 lm/W	4538 lm	4538 lm	
	MEDIUM	45.0 W		4828 lm	4828 lm	
	LARGE	60.0 W		5445 lm	5445 lm	



FIXTURE SHOWN IS MEDIUM DIRECT 15W/FT MOUNTED 6 FEET ABOVE TABLE


FIXTURE PROFILE

LIGHT SOURCE	3.5 W/FT, 7.0W/FT, 11.0W/FT, 15.0W/FT
DISTRIBUTION	DIRECT, DIRECT/INDIRECT
COLOR	2700K, 3000K, 3500K, 4000K
CRI	82 (OPTIONAL 90 CRI)
PERFORMANCE	UP TO 105 lm/W
VOLTAGE	UNIVERSAL 120-277 V
POWER	REMOTE POWER SUPPLY
DIMMING	0-10V, LUTRON HI-LUME 1% ECOSYSTEM
LENGTHS	SMALL (32"), MEDIUM (43"), LARGE (55")
MOUNTING	POWERED SUSPENSION CABLES
HOUSING	0.125" THICK POWDER COATED ALUMINUM
END CAPS	MACHINED ALUMINUM, BRASS
LENS	HIGH PERFORMANCE EXTRUDED ACRYLIC
FINISH	TEXTURED WHITE, TEXTURED BLACK
WARRANTY	5-YEAR LIMITED
CERTIFICATION	ETL AND cETL APPROVED FOR DRY LOCATION

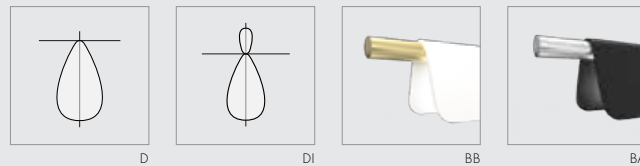


DIMENSIONS (j-box mounting shown)


ADOBE SMALL

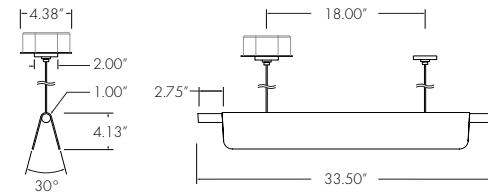


ADOBE MEDIUM

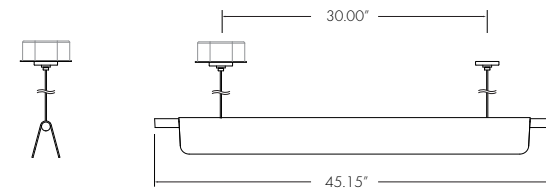

ADOBE LARGE

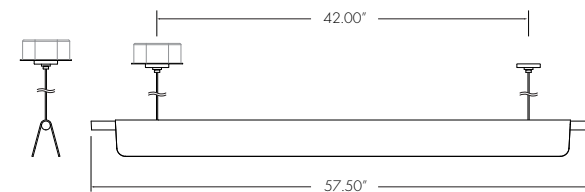


MOUNTING HEIGHT

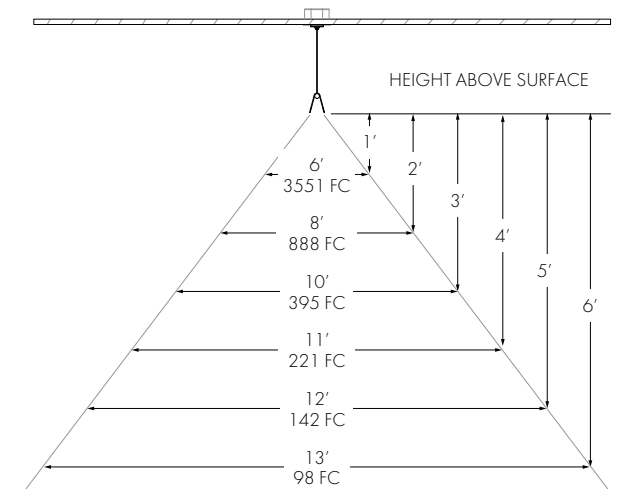

ILLUMINATED AREA
Note: Recommended mounting heights are approximations using a medium 15W/FT fixture

ORDER OPTIONS

ADB




A FIXTURE	ADOBE	ADB
B OUTPUT	3.5 WATTS/FT	3W
	7.0 WATTS/FT	7W
	11.0 WATTS/FT	11W
	15.0 WATTS/FT	15W
	not available with direct/indirect fixture	
C LED COLOR	2700K	27K
	3000K	30K
	3500K	35K
	4000K	40K
D LIGHT DIRECTION	DIRECT	D
	DIRECT/INDIRECT	DI
E SIZE	SMALL (34")	SM
	MEDIUM (46")	MED
	LARGE (58")	LRG
F MOUNTING	JBOX	JBOX-X
	ARCHITECTURAL	ARCH-X
	X = cable length specify 24", 36", 48", 72", or 96" contact factory for additional lengths if architectural mounting is selected no jbox cover plate is provided with fixture	
G CONTROL	NO DIMMING	NO
	0-10V DIMMING	DIM
	LUTRON	LES-LDE1
	Hi-Lume 1% EcoSystem with Soft-On and Fade-to-Black not available in 11W or 15W medium and large	
	see Contra specification sheet for details controls by others	
H FINISH	TEXTURED WHITE	TW
	TEXTURED BLACK	TB
	CUSTOM COLOR	CC
	contact factory for other standard and custom finishes	
I OPTIONS	BRUSHED BRASS ENDS	BB
	BRUSHED ALUMINUM ENDS	BA
	HIGH CRI +90	HCRI
	PLENUM POWER SUPPLY	PL
	plenum power supply available with j-box mounting only	
	SURFACE POWER CANOPY	SUR
	powered suspension cable j-box mounting only not available in large 11W direct/indirect fixture	
	LOUVER	LV
	louver is provided with the same finish as the fixture housing	

REMOTE POWER (supplied with fixture)


REMOTE POWER CONTRA C0.5 - 60W

Provided with all fixtures except large 11W/FT direct/indirect

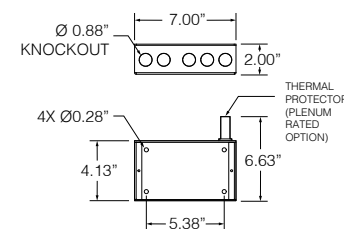


REMOTE POWER CONTRA C1.0 - 96W

Provided only with large 11W/FT direct/indirect fixtures

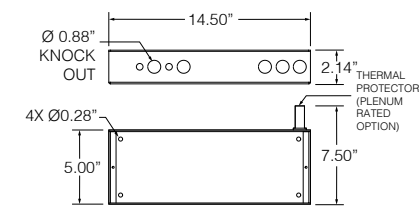


SURFACE POWER CANOPY

Optional surface mounted canopy enclosure for hard ceiling applications with integral driver. Not available with 11W direct/indirect fixtures.

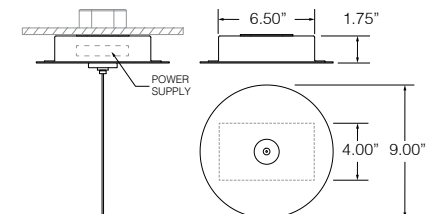

INSIGHT

SHAPING THE EXPERIENCE OF LIGHT®

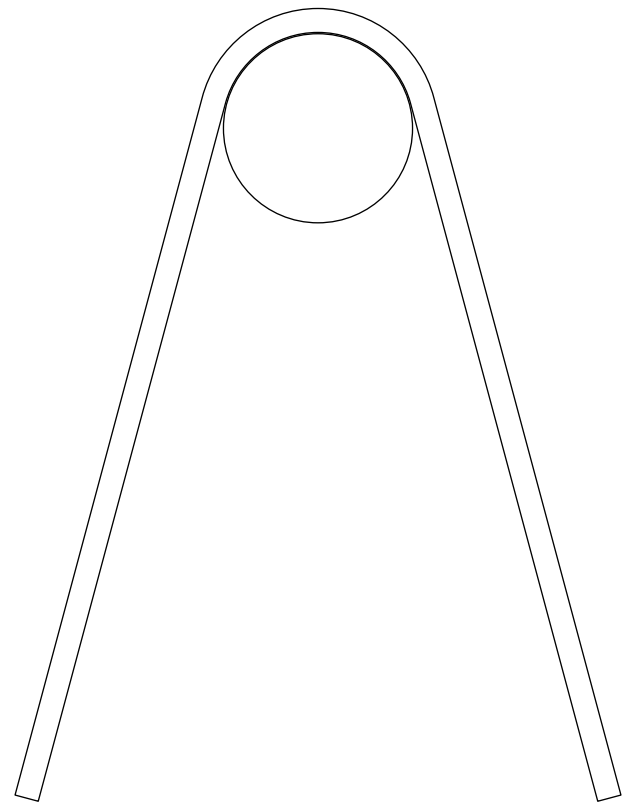

4341 FULCRUM WAY NE
RIO RANCHO, NEW MEXICO 87144
505.345.0888
INSIGHTLIGHTING.COM