

PROJECT:

TYPE:


CATALOG #:

PROFILE


LIGHT SOURCE	3.5W/FT, 7.0W/FT, 11.0W/FT, 15.0W/FT
DISTRIBUTION	DIRECT, DIRECT/INDIRECT
WHITE CCT	2700K, 3000K, 3500K, 4000K
CRI	82 (OPTIONAL 90 CRI)
PERFORMANCE	UP TO 105 LM/W DELIVERED
VOLTAGE	UNIVERSAL 120-277 V
POWER	REMOTE POWER SUPPLY
DIMMING	0-10V, LUTRON HI-LUME 1% ECOSYSTEM
LENGTHS	SMALL (32"), MEDIUM (43"), LARGE (55")
WEIGHT	SMALL 7LBS, MEDIUM 8LBS, LARGE 10LBS
HOUSING	0.125" THICK POWDER COATED ALUMINUM
MOUNTING	POWERED SUSPENSION CABLES
END CAPS	MACHINED ALUMINUM, BRASS
LENS	HIGH PERFORMANCE EXTRUDED ACRYLIC
FINISH	TEXTURED WHITE, TEXTURED BLACK
WARRANTY	5-YEAR LIMITED
CERTIFICATION	ETL AND cETL FOR DRY LOCATION



DISTRIBUTION



PROFILE

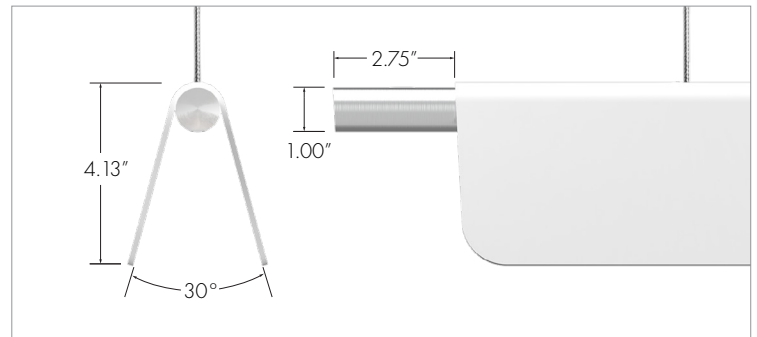

PERFORMANCE SUMMARY

DIRECT		
3000K, 11W/FT	LUMENS	EFFICACY
SMALL (34")	3442	103.0 lm/W
MEDIUM (46")	3630	103.0 lm/W
LARGE (58")	4094	103.0 lm/W
DIRECT/INDIRECT		
3000K, 11W/FT	LUMENS DOWN/UP	EFFICACY
SMALL (34")	2424/724	96.0 lm/W
MEDIUM (46")	3030/905	96.0 lm/W
LARGE (58")	3636/1068	96.0 lm/W

ACCESSORIES / OPTIONS



PROJECT:	TYPE:	CATALOG #:
----------	-------	------------

SPECIFICATION

ADB									
1	2	3	4	5	6	7	8	9	

1 FIXTURE

ADOBE ADB

2 WATTAGE

3.5 WATTS/FT	3.5W
7.0 WATTS/FT	7W
11.0 WATTS/FT	50W
15.0 WATTS/FT	100W
<small>not available with direct/indirect</small>	

3 CCT

2700K	27K
3000K	30K
3500K	35K
4000K	40K

4 DISTRIBUTION

DIRECT	D
DIRECT/INDIRECT	DI

5 SIZE

SMALL (34")	SM
MEDIUM (46")	MED
LARGE (58")	LRG

6 SINGLE MOUNTING

JBOX	JBOX-X
ARCHITECTURAL	ARCH-X

X = cable length specify up to 96"

7 CONTROL

NON-DIMMING	NO
0-10V DIMMING	DIM
LUTRON	LES-LDE1
<small>Hi-lume 1% EcoSystem with Soft-On and Fade-to-Black</small>	
<small>See Contra specification sheet for details dimming Control system to be supplied by others</small>	

8 FINISH



TEXTURED WHITE	TW
TEXTURED BLACK	TB
CUSTOM COLOR	CC
<small>contact factory for custom color additional charges will apply</small>	
<small>end posts are powder coated to match fixture body unless specified otherwise</small>	

9 OPTIONS

BRUSHED BRASS ENDS	BB
BRUSHED ALUMINUM ENDS	BA
LOUVER	LV
<small>louver is provided with the same finish as the fixture housing</small>	
MACHINED AL. END CAPS	MA
HIGH CRI +90	HCRI
PLENUM PWR SUPPLY	PL
<small>plenum power supply available with j-box mounting only</small>	
SURFACE POWER CANOPY	SUR
<small>powered suspension cable j-box mounting only not available in large 11W direct/indirect fixture</small>	

PROJECT:	TYPE:	CATALOG #:
----------	-------	------------


PERFORMANCE

WATTAGE	LENGTH	LED COLOR TEMPERATURE	TOTAL WATTAGE	LUMINAIRE EFFICACY	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT
DIRECT/INDIRECT								
	3.5 W/FT	3000K						
	SMALL		10.5 W	98 lm/W	976 lm	77% DOWN / 23% UP	751 lm	224 lm
	MEDIUM		17.5 W		1220 lm		939 lm	281 lm
	LARGE	24.5 W		1464 lm	1127 lm		337 lm	
	7.0 W/FT	3000K						
	SMALL		21.0 W	97 lm/W	1983 lm	77% DOWN / 23% UP	1527 lm	456 lm
	MEDIUM		35.0 W		2479 lm		1909 lm	570 lm
	LARGE	49.0 W		2975 lm	2291 lm		684 lm	
	11.0 W/FT	3000K						
SMALL	33.0 W		96 lm/W	3148 lm	77% DOWN / 23% UP	2424 lm	724 lm	
MEDIUM	55.0 W			3935 lm		3030 lm	905 lm	
LARGE	77.0 W		4722 lm	3636 lm		1086 lm		
DIRECT								
	3.5 W/FT	3000 K						
	SMALL		7.0 W	105 lm/W	1086 lm	100% DOWN	1086 lm	
	MEDIUM		10.5 W		1155 lm		1155 lm	
	LARGE	14.0 W		1303 lm	1303 lm			
	3.5 W/FT	3000 K						
	SMALL		14.0 W	104 lm/W	2129 lm	100% DOWN	2129 lm	
	MEDIUM		21.0 W		2265 lm		2265 lm	
	LARGE	28.0 W		2555 lm	2555 lm			
	3.5 W/FT	3000 K						
	SMALL		22.0 W	103 lm/W	3442 lm	100% DOWN	3442 lm	
	MEDIUM		33.0 W		3630 lm		3630 lm	
	LARGE	44.0 W		4094 lm	4094 lm			
3.5 W/FT	3000 K							
SMALL		30.0 W	101 lm/W	4538 lm	100% DOWN	4538 lm		
MEDIUM		45.0 W		4828 lm		4828 lm		
LARGE	60.0 W		5445 lm	5445 lm				


PROJECT:	TYPE:	CATALOG #:
----------	-------	------------

DIMENSIONS


ADOBE SMALL

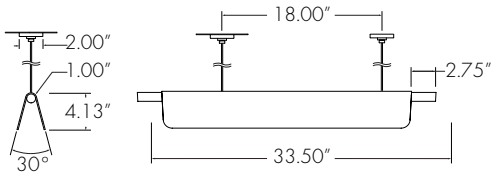


ADOBE MEDIUM

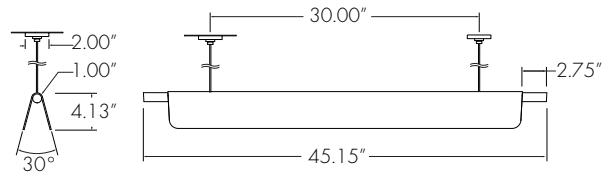


ADOBE LARGE

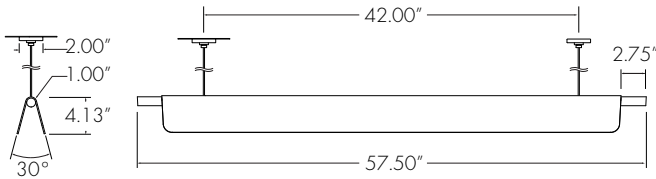


ADOBE XL

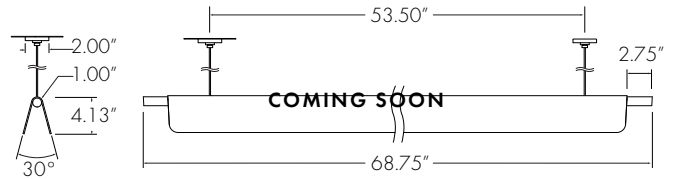


ADOBE XXL

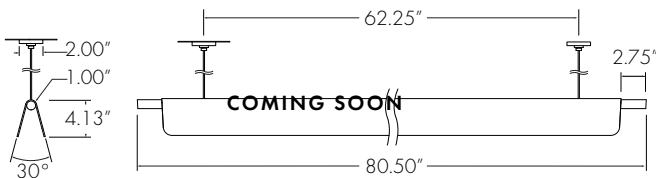

ADOBE XXXL

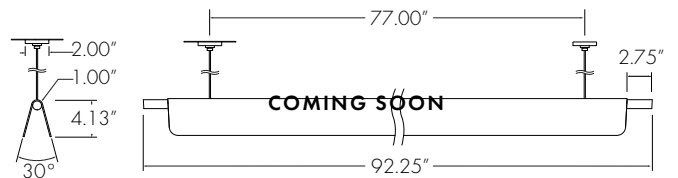


MOUNTING HEIGHT

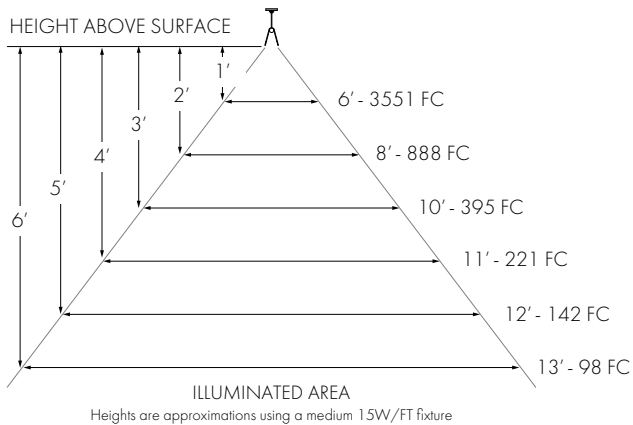


PROJECT:	TYPE:	CATALOG #:
----------	-------	------------

REMOTE POWER CONTRA C0.5 - UP TO 60W

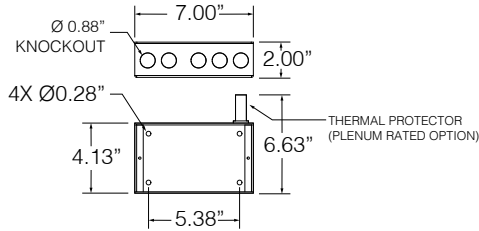


Provided with 24" and 48" fixtures up to 15W/FT with non-dimming or 0-10V dimming options. 96" fixtures up to 7W/FT with non-dimming or 0-10V dimming option

REMOTE POWER CONTRA C0.5 - UP TO 96W

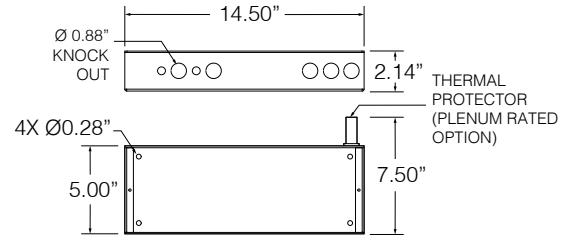


Provided with 96" fixtures up to 11W/FT with non-dimming or 0-10V dimming options. Lutron Hi-Lume, 1% Ecosystem power supply.

SURFACE MOUNT CANOPY

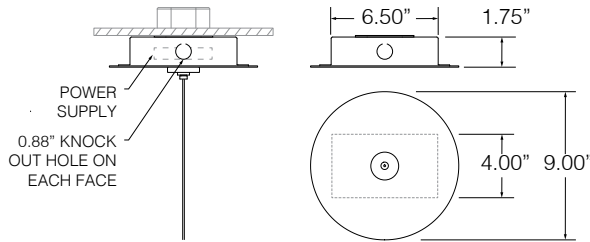

Optional surface mounted canopy for any output with non-dimming or 0-10V dimming options with 0.875 knockout holes on each face.

MOUNTING CONFIGURATIONS

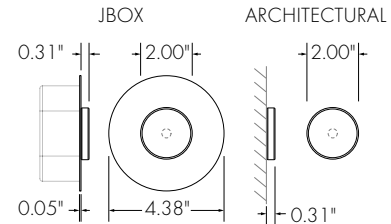

All jbox configurations mount to a standard 4-0 jbox (provided by others). All architectural configurations mount directly to the wall or ceiling using concealed fasteners and it is the responsibility of the installer to enclose any splicing as per local codes and ordinances. All mounting components powder coated white unless otherwise specified.

ADDITIONAL INFORMATION

REMOTE POWER SUPPLY

- ENCLOSURE: 14 gauge aluminum sheet metal, with pre-drilled mounting holes and a removable cover plate for easy wiring access.
- FINISH: All enclosure surfaces are pre-treated and powder coat painted textured black to a 3 mil thickness.
- ELECTRICAL: Contra power supplies are 120-277VAC, output 38VDC. Contra is also available as a plenum ready power supply. AC power is fed to Contra via 0.5" conduit (provided by others) and AC connections are made within the enclosure. All Contra's are 0.5" conduit ready.
- DROP: Distance from power supply to fixture not to exceed 25'.

MOUNTING DETAILS

- SUSPENSION: The cabling used to suspend the fixture in the ACC configuration also transfers the fixture's power, and as such requires a specific splicing technique if cut in the field ([see installation instructions](#)). End caps, hubs are painted to match fixture. Canopy and jbox covers are painted semi-gloss white. Optional machined end caps which includes a machined hub.